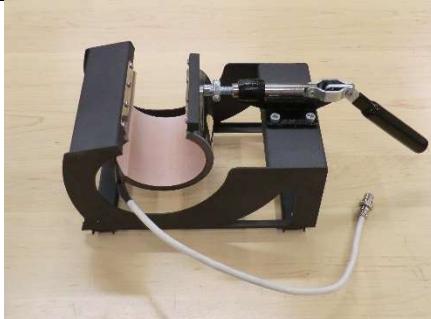


Sublimation – Using Other Mug Attachments

Step 1: Locate the mug press

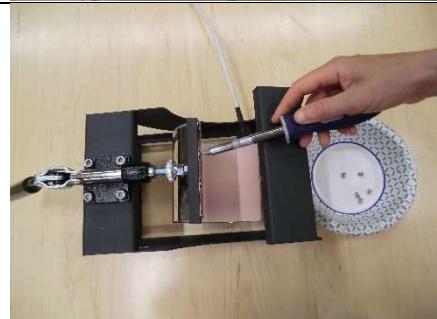
- From the bin of press attachments, find the mug press.

**Step 2: Locate the desired mug attachment**

- The insert that is usually in the mug press is for a standard 11 oz mug. (note: after using other attachments, always return the 11 oz mug attachment to the press.)
- Pictured from left to right:
 - 17 oz tapered mug attachment
 - 12 oz tapered mug attachment
 - 6 oz espresso mug attachment (note: this attachment is taller than a 6 oz mug, to allow it to fit in the press.)

**Step 3: Remove the attachment currently in the press**

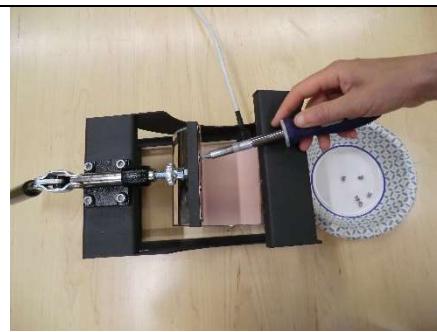
- With a screwdriver, remove the 8 screws that hold the attachment to the press.
- It helps to place the removed screws in a cup or bowl to keep them from getting lost.

**Step 4: Insert the new attachment**

- Slide the new attachment into place.
- On the smaller attachments, it is necessary to loosen the pressure screw quite a bit in order to get it to fit.

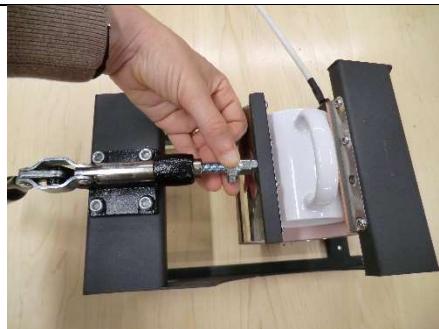
**Step 5: Screw the new attachment into place**

- Replace all 8 screws to secure it to the press.
- The process goes more smoothly if you start with the side closer to the handle, and insert the two end screws first and then the two middle ones.
- The screws need only a gentle tightening.

[MORE→](#)

Step 6: Adjust the pressure

- Insert a mug into the attachment and close the handle to check the pressure.
- Adjust the screw rod controlling the pressure until the handle requires effort to close, but not gorilla strength.

**Step 7: Use the mug press**

- Follow the steps in the Technique Tutorial “Using the Mug Press” to press your item(s).

**Step 8: Return the mug press to its original configuration**

- When finished, follow the steps in this tutorial again to return the 11 oz mug insert to the press.
- Ask a staff member to let you borrow an 11 oz mug to use to check the pressure on the press.

